


# EVEREADY 1222

9V



## Industry Standard Dimensions

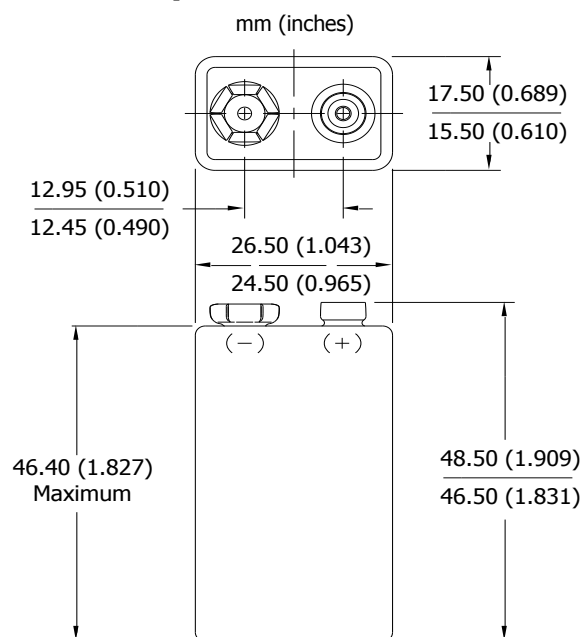


## Specifications




|                         |                                                                                           |
|-------------------------|-------------------------------------------------------------------------------------------|
| <b>Classification:</b>  | Super Heavy Duty                                                                          |
| <b>Chemical System:</b> | Leclanché<br>Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> )<br>No added mercury or cadmium |
| <b>Designation:</b>     | ANSI-1604D, IEC-6F22                                                                      |
| <b>Nominal Voltage:</b> | 9.0 volts                                                                                 |
| <b>Operating Temp:</b>  | -5°C to 55°C (20°F to 130°F)                                                              |
| <b>Typical Weight:</b>  | 37.0 grams (1.3 oz.)                                                                      |
| <b>Typical Volume:</b>  | 20.3 cubic centimeters (1.2 cubic inches)                                                 |
| <b>Jacket:</b>          | Metal                                                                                     |
| <b>Terminal:</b>        | Miniature Snap                                                                            |

## Milliamp-Hours Performance

Continuous discharge to 4.8 volts at 21°C

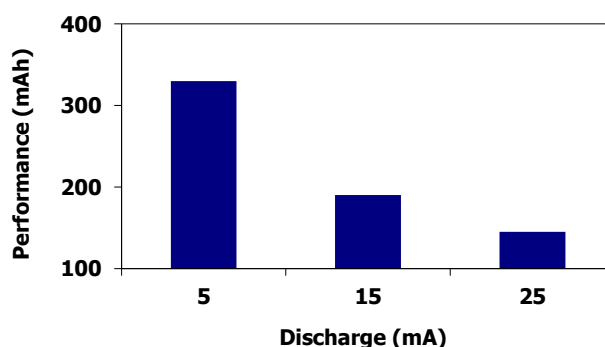

## Industry Standard Tests (21°C)

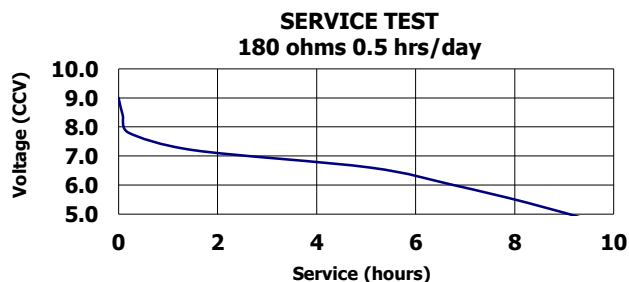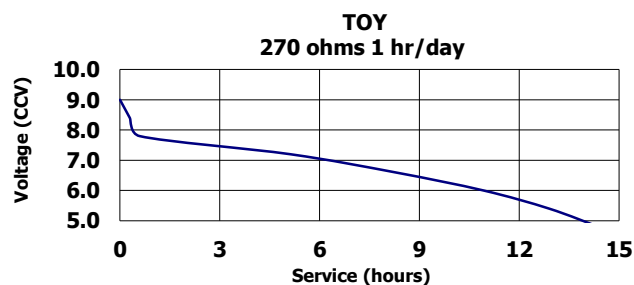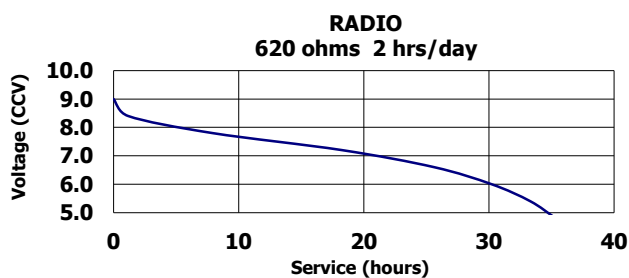

## Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
**Contents herein do not constitute a warranty and are for reference only.**