



CYG

CB-HFT (600) DATA SHEET

CB-HFT (600) PREMIUM GENERAL PURPOSE HEAT-SHRINK TUBING


CB-HFT (600) is halogen-free, flexible, flame-retardant polyolefin heat-shrinkable tubing. This tubing is low smoke generating abrasion resistant and in case of burning, produce no dioxin. CB-HFT (600) tubing is widely used in enclosed areas where flame-retardant, halogen-free environment is required. Certifications: UL, CUL, F-Mark, Sony Green Partner

Premium Series:

Advanced Processing, 100% Virgin Materials, Japanese or USA Additives, Highest Agency Ratings.

Economy Series:

Standard Processing. Includes Re-grind Material to % Allowed by Agency Ratings. Chinese Additives,

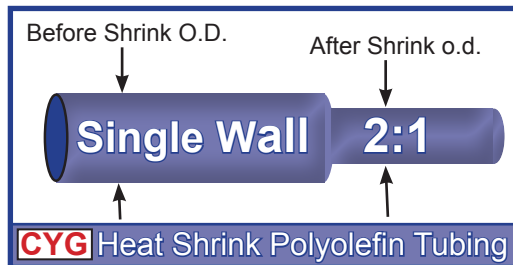

APPLICATIONS

Used in home, office, or industrial environments to protect connections and wire, color code wires, bundle wires and cables in computers, appliances, machinery, and industrial equipment. Popular in automobile, railway, aerospace, construction, power delivery, mass transit vehicles. and marine vessel applications.

Premium Series Part Number	Before Shrink (mm)		After Shrink (mm)		Inch Eqiv.	Reel Meters
	Inside Dia.	Wall Thickness	Inside Dia.	Wall-thickness		
CB-HFT 600V 1.0	1.50 ± 0.20	0.18 ± 0.05	≤ 0.60	0.36 ± 0.08		200
CB-HFT 600V 1.5	2.00 ± 0.20	0.18 ± 0.05	≤ 0.80	0.36 ± 0.08	.047	200
CB-HFT 600V 2.0	2.50 ± 0.20	0.20 ± 0.05	≤ 1.00	0.42 ± 0.08	.063	200
CB-HFT 600V 2.5	3.00 ± 0.20	0.22 ± 0.05	≤ 1.25	0.46 ± 0.08	.094	200
CB-HFT 600V 3.0	3.50 ± 0.20	0.22 ± 0.05	≤ 1.50	0.46 ± 0.08		200
CB-HFT 600V 3.5	4.00 ± 0.20	0.22 ± 0.05	≤ 1.75	0.46 ± 0.08	.125	200
CB-HFT 600V 4.0	4.60 ± 0.20	0.22 ± 0.05	≤ 2.00	0.48 ± 0.08		200
CB-HFT 600V 4.5	5.00 ± 0.20	0.23 ± 0.05	≤ 2.25	0.46 ± 0.10		200
CB-HFT 600V 5.0	5.50 ± 0.20	0.25 ± 0.05	≤ 2.50	0.50 ± 0.10		100
CB-HFT 600V 6.0	6.50 ± 0.20	0.25 ± 0.05	≤ 3.00	0.55 ± 0.10		100
CB-HFT 600V 6.5	6.90 ± 0.20	0.25 ± 0.05	≤ 3.25	0.55 ± 0.10	.250	100
CB-HFT 600V 7.0	7.50 ± 0.20	0.25 ± 0.05	≤ 3.50	0.55 ± 0.10		100
CB-HFT 600V 8.0	8.50 ± 0.20	0.28 ± 0.10	≤ 4.00	0.58 ± 0.10		100
CB-HFT 600V 9.0	9.50 ± 0.20	0.28 ± 0.10	≤ 4.50	0.58 ± 0.10	.375	100
CB-HFT 600V 10.0	10.50 ± 0.30	0.28 ± 0.10	≤ 5.00	0.58 ± 0.10		100
CB-HFT 600V 11.0	11.50 ± 0.30	0.28 ± 0.10	≤ 5.50	0.58 ± 0.10		100
CB-HFT 600V 12.0	12.50 ± 0.30	0.28 ± 0.10	≤ 6.00	0.58 ± 0.10		100
CB-HFT 600V 13.0	13.50 ± 0.30	0.28 ± 0.12	≤ 6.50	0.58 ± 0.10	.500	100
CB-HFT 600V 14.0	14.50 ± 0.30	0.28 ± 0.12	≤ 7.00	0.58 ± 0.10		100
CB-HFT 600V 15.0	15.50 ± 0.30	0.28 ± 0.12	≤ 7.50	0.58 ± 0.10		100
CB-HFT 600V 16.0	16.50 ± 0.30	0.28 ± 0.12	≤ 8.00	0.58 ± 0.10		100
CB-HFT 600V 17.0	17.50 ± 0.30	0.28 ± 0.12	≤ 8.50	0.65 ± 0.12		100
CB-HFT 600V 18.0	18.50 ± 0.30	0.32 ± 0.15	≤ 9.00	0.68 ± 0.12		100
CB-HFT 600V 20.0	20.60 ± 0.50	0.32 ± 0.15	≤ 10.00	0.60 ± 0.15	.750	100
CB-HFT 600V 22.0	22.60 ± 0.50	0.35 ± 0.15	≤ 11.00	0.72 ± 0.12		100
CB-HFT 600V 25.0	25.60 ± 0.70	0.40 ± 0.15	≤ 12.50	0.78 ± 0.12	1.00	100
CB-HFT 600V 28.0	28.60 ± 0.70	0.40 ± 0.15	≤ 14.00	0.78 ± 0.12		100
CB-HFT 600V 30.0	30.60 ± 0.70	0.40 ± 0.15	≤ 15.00	0.82 ± 0.12		100
CB-HFT 600V 50.0	41.00 ± 0.50	0.55 ± 0.20	≤ 26.00	1.10 ± 0.15	2.00	100
CB-HFT 600V 60.0	60.50 ± 1.00	0.60 ± 0.25	≤ 30.00	1.25 ± 0.20		100
CB-HFT 600V 80.0	81.00 ± 1.00	0.60 ± 0.30	≤ 40.00	1.25 ± 0.20	3.00	100
CB-HFT 600V 100.0	101.60 ± 1.0	0.60 ± 0.30	≤ 50.00	1.25 ± 0.20	4.00	100



www.cyg.com

CYG 长园

UL File No: E180908
 TS 16949:200 • ISO 9001:2008
 ISO 14001:2004 • EU RoHS REACH

CYG

CB-HFT (600) DATA SHEET

CB-HFT (600) PREMIUM GENERAL PURPOSE HEAT-SHRINK TUBING (Continued)

Technical Information

Attribute	Test Method	Specifications
Shrink Temperature	Company Standard	90°C
Operating Temperature Range	UL224	-55°C-125°C
Radial Shrink Ratio	Blank	>50%
Longitudinal Change	ASTM D2671	-5% -+5%
Tensile Strength	ASTM D638	>10.4 MPa
Elongation at Break	ASTM D638	>200%
Aging in Circulation Air Oven	158°C +/- 1.0°C, 168 Hrs	Blank
Tensile Strength after Aging	ASTM D638	>7.3 MPa
Elongation at Break after Aging	ASTM D638	>100%
Volume Resistance	ASTM D2671	>1.0 x 10 ¹² Ω/cm
Dielectric Strength	UL224 AC2500V, 1min	No Breakdown
Heat Shock	UL224	No Cracking
Flammability	UL224	VW-1
Concentricity	ASTM D2671	>70%

